

L1L2-2GAD

GPS Active DAGR Antenna

DESCRIPTION

The L1L2-2GAD is a dual band active L1/L2 GPS antenna which is specifically designed for operation with the US DoD DAGR military grade receiver. The L1L2-2GAD is available with a bottom or a side mount connector and multiple colors (per FED-STD-595B).

FEATURES

- Designed Specifically for Operation with the Defense Advanced GPS Receiver (DAGR)
- L1/L2 Dual Band
- Specification Compliant Performance Over the Entire Environmental and Voltage Range
- Bottom Mount
- Multiple Color Options

OPTIONS

The L1L2-2GAD comes with many available options to meet specific needs. Please contact GPS Source via phone, email, or visit the website for further information on product options and specifications.



1 L1L2-2GAD Specifications

Table 1-1. Electrical Specifications


Operating Temperature -54°C to 71°C

Parameter		Conditions	Min	Тур	Max	Units	
Frequency Range (Passband)	L1	Ant: Output = 50Ω	1560	1575.42	1590	MHz	
	L2		1212	1227.60	1242		
Out Impedance				50		Ω	
Element Gain	L1	Output = 50Ω , 4ft G.P.	3	3.40	4	dBiC	
	L2		3	6.70	7		
LNA Gain	L1	Output = 50Ω		30		dB	
	L2			30			
Output SWR		Output = 50Ω			2:1	_	
Required DC Input Voltage			3.30		16	VDC	
LNA Current		Output = 50Ω, 3.3V		31	35	mA	
LNA OP1dB Compression				8		dBm	
LNA OIP3				20		dBm	
Noise Figure		Output = 50Ω, 3.3V		3	3.5	dB	
Rejection	+/-50MHz	> 12dB					
	+/-100MHz	> 42dB					
Polarization		Right Hand Circular					
Axial Ratio at Peak		2dB Max					
Beam Width		115° +/-5° at -3dB from Peak					
Altitude		50,000ft					
Lightning Protection		DC Ground on the Antenna Element					

2 Performance Data


2.1 L1 Center Frequency

Figure 2-1. Far Field Plots No Ground Plane

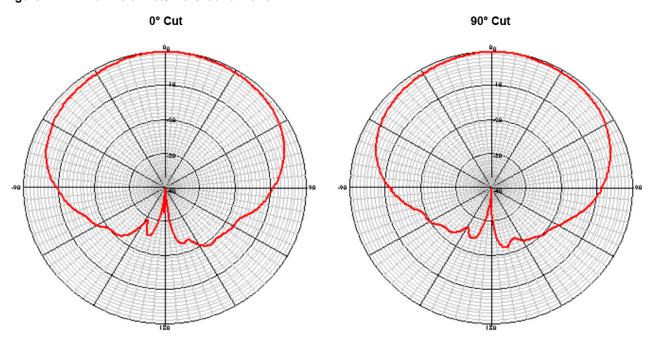

2.2 L2 Center Frequency

Figure 2-2. Far Field Plots No Ground Plane

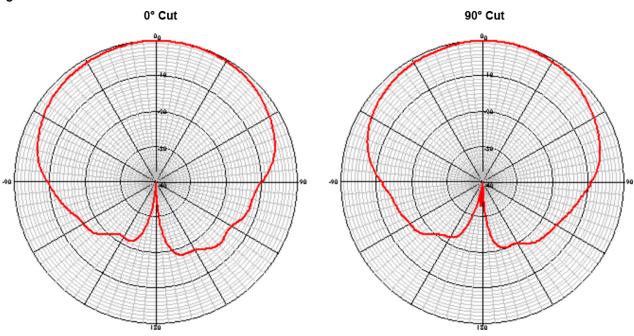



3 Environmental Requirements

The L1L2-2GAD has been designed to meet the MIL-STD-810 following requirements.

Table 3-1. MIL-STD-810 Requirements


Environment	MIL-STD	9-810 Requirements
Mechanical Vibration	810G	Mtd 514.6
Functional Shock	810G	Mtd 516.6
Crash Hazard	810G	Mtd 516.6
Temperature and Altitude	810D	Mtd 520.0, Proc. III
Temperature Shock	810D	Mtd 503.2, Proc. I
Humidity	810D	Mtd 507.2, Proc. III
Salt Fog	810D	Mtd 509.2, Proc. I
Fungus	810D	Mtd 508.3
Sand and Dust:	810D	Mtd 510.2, Proc. I
Explosive Atmosphere	810D	Mtd 511.2, Proc. I

4 Product Options

Table 4-1. L1L2-2GAD Available Options

Туре	Options		
	N	Male and Female	
Connector	SMA	Male and Female	
	TNC	Female	
Mounting	Bottom Mount		
Mounting	Pole		
	White (Standard)	Gloss	
	Black	Matte	
Color (FED-STD-595B)	Olive Green	Matte	
,	Desert Sand	Matte	
	Gray	Matte	

5 Product Code Decoder

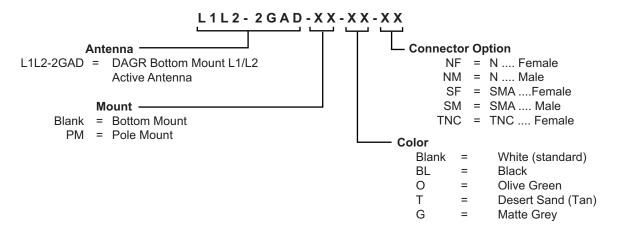


Note: To have product/part codes customized to meet exact needs, contact GPS Source at GPSS-Sales@gd-ms.com or visit the website at www.gpssource.com.



Mechanical Drawing

6.1 L1L2-2GAD GPS Active DAGR Antenna Bottom Mount

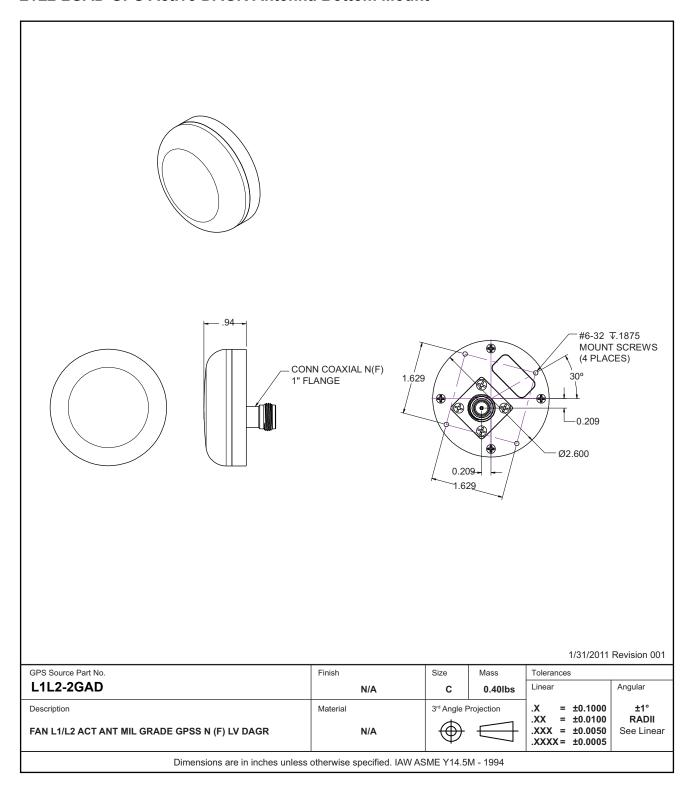



2121 Executive Cir., Ste 100 Colorado Springs, CO 80906 Phone: (+1)(719) 421.7300

Toll Free: (+1)(866) 289.4777 GPSS-Sales@gd-ms.com

www.gpssource.com

AS9100 and ISO 9001 Compliant Company





L1L2-2GAD Data Sheet

059-FAN-ADD-CYY-PZZ-005

Page 7 of 7, 01/14/2020

© 2014 GPS Source, Inc. All rights reserved.

GPS Source, Inc., GPS Live Inside, GPS Source logo, and other GPS Source, Inc. products, brands, and trademarks mentioned in this document are property of GPS Source, Inc. and/or its affiliates in the United States and/or other countries. Other products, brands, and trademarks are property of their respective owners/companies. Any rights not expressly granted herein are reserved.

DISCLAIMER: The materials in this document could include inaccuracies or typographical errors and are subject to change at any time. The materials are provided "as is" without warranty of any kind. To the maximum extent permitted by applicable law, GPS Source, Inc. and its suppliers hereby disclaim all warranties, either expressed or implied, and conditions with respect to the materials, their quality, performance, suitability, merchantability, fitness for a particular purpose, title, and non-infringement. LIMITATION OF LIABILITY: IN NO EVENT WILL GPS SOURCE, INC. AND ITS SUPPLIERS BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, WHETHER IN AN ACTION OF CONTRACT OR TORT, ARISING OUT OF THE USE OR INABILITY TO USE THE MATERIALS AVAILABLE IN THIS DOCUMENT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN PARTICULAR AND WITHOUT LIMITATION, GPS SOURCE, INC. SHALL HAVE NO LIABILITY FOR ANY LOSS OF USE, DATA, INCLUDING THE COSTS OF RECOVERING SUCH DATA, OR PROFITS.