


AsteRx SB3 Pro

Housed multi-frequency GNSS rover receiver

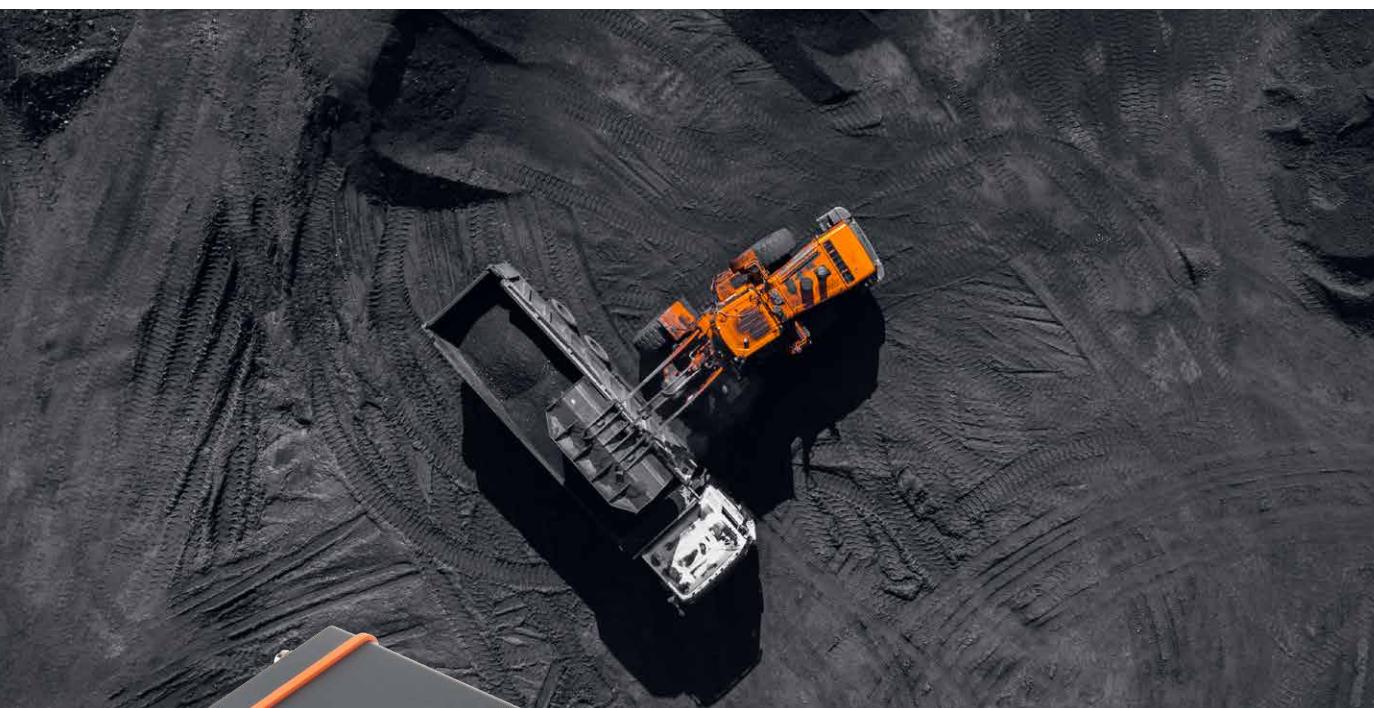

AsteRx SB3 Pro is a multi-frequency GNSS receiver delivering centimeter-level RTK positioning in a rugged enclosure. Its compact and rugged housing is tailored for effortless integration in machine automation applications.

KEY FEATURES

- ▶ All in view, multi-constellation, multi-frequency satellite tracking
- ▶ Robust and compact IP68 weatherproof housing
- ▶ AIM+ advanced anti-jamming, anti-spoofing monitoring and mitigation technology
- ▶ Sub-degree GNSS heading option
- ▶ GNSS+ algorithms guaranteeing reliable performance



Rover applications

The AsteRx SB3 Pro is a rover GNSS receiver with best-in-class positioning performance, employing Septentrio's latest multifrequency multi-constellation RTK technology. It delivers robust and reliable positions in challenging environments in both single or dual antenna modes. Its specialized design makes it an easy-to-use, cost-efficient rover receiver.

Feature-rich in a compact design

Simultaneous multi-constellation, multi-frequency tracking combined with the GNSS+ toolset and high-update rate, low-latency output mean that AsteRx SB3 Pro is ideally suited for any space-constrained industrial application under any conditions.

Ease of integration

The AsteRx SB3 Pro integrates seamlessly into any system thanks to fully documented interfaces, commands and data messages. Septentrio's open interfaces and software tools (WebUI, RxTools) make it easy to integrate, configure and control the AsteRx SB3 Pro.

FEATURES	PERFORMANCE	PHYSICAL AND ENVIRONMENTAL
GNSS signals 544 Hardware channels for simultaneous tracking of most visible signals: ► GPS: L1 C/A, L1C, L2C, L2 P(Y), L5 ► GLONASS: L1 C/A, L2C/A, L3, L2P ► BeiDou: B1I, B1C, B2a, B2b, B2I, B3I ► Galileo: E1, E5a, E5b ► QZSS: L1 C/A, L1 C/B, L2C, L5 ► NavIC: L5 ► SBAS: EGNOS, WAAS, GAGAN, MSAS, SDCM	RTK performance ^{1,2,3} Horizontal accuracy 0.6 cm + 0.5 ppm Vertical accuracy 1 cm + 1 ppm Initialisation 7 s	SWaP Size 102 x 36 x 118 mm / 4.0 x 1.4 x 4.6 in Weight 497 g / 1.1 lb Input voltage 5 to 36 VDC
Septentrio's patented GNSS+ technologies ► AIM+ industry leading anti-jamming, anti-spoofing interference monitoring & mitigation technology ► APME+ a posteriori multipath estimator for code and phase multipath mitigation ► LOCK+ superior tracking robustness under heavy mechanical shocks or vibrations ► IONO+ advanced scintillation mitigation ► RAIM+ (Receiver Autonomous Integrity Monitoring)	GNSS attitude accuracy ^{1,2,8} Antenna separation Heading Pitch/Roll 1 m 0.15° 0.25° 5 m 0.03° 0.05°	Power consumption GPS/GLO L1/L2 1.1 W All signals, all GNSS constellations 1.3 W Maximum 2.5 W
Formats Septentrio Binary Format (SBF), fully documented with sample parsing tools NMEA 0183, v3.01, v4.0 RTCM v2.x, v3.x (MSM messages included) CMR v2.0 and CMR+ (CMR+ input only)	Position accuracy ^{1,2} Horizontal Vertical Standalone 1.2 m 1.9 m SBAS 0.6 m 0.8 m DGNSS 0.4 m 0.7 m	Connectors Antenna 2 x TNC ETH ODU 4 pins COM1/GPIO ODU 7 pins PWR/USB/COM2/COM3 ODU 7 pins
Connectivity 3 Hi-speed serial ports (RS232) Ethernet port (TCP/IP, UDP, LAN 10/100 Mbps) Power over ethernet 1 High-speed/full-speed USB device port 2 Event markers FTP server	Velocity accuracy ^{1,2} 0.03 m/s Maximum update rate Position 10 Hz Measurements 10 Hz Latency ⁴ <10 ms Time precision xPPS out ⁵ 5 ns Event accuracy < 20 ns Time to first fix Cold start ⁶ < 45 s Warm start ⁷ < 20 s Re-acquisition avg. 1 s	Antenna LNA power output on TNC Output voltage 5 VDC Maximum current 150 mA Environmental Operating temperature -30° C to +65° C -22° F to +149° F Storage temperature -40° C to +75° C -40° F to +167° F Humidity MIL-STD-810G, Method 507.5, Procedure I Dust MIL-STD-810G, Method 510.5, Procedure I Shock MIL-STD-810G, Method 516.6, Procedure I/II Vibration MIL-STD-810G, Method 514.6, Procedure I
SUPPORTING COMPONENTS Embedded Web UI with full control and monitoring functionality. RxTools, a complete and intuitive GUI tool set for receiver control, monitoring, data analysis and conversion. GNSS receiver communication SDK. Available for both Windows and Linux.	Tracking performance (C/N0 threshold) Tracking 20 dB-Hz Acquisition 33 dB-Hz	Certification RoHS, WEEE, CE, FCC Class A Part 15, IEC 62368-1
Optional accessories ► Antennas ► SDK library for UAS applications		 

¹ Open sky conditions

² RMS level

³ Baseline < 40 Km

⁴ 99.9%

⁵ Including software compensation of sawtooth effect

⁶ No information available (no almanac, no approximate position)

⁷ Ephemeris and approximate position known

⁸ Optional feature

